


μ -CONNECT


THE SHRINK FIT UNIT




K-CONNECT

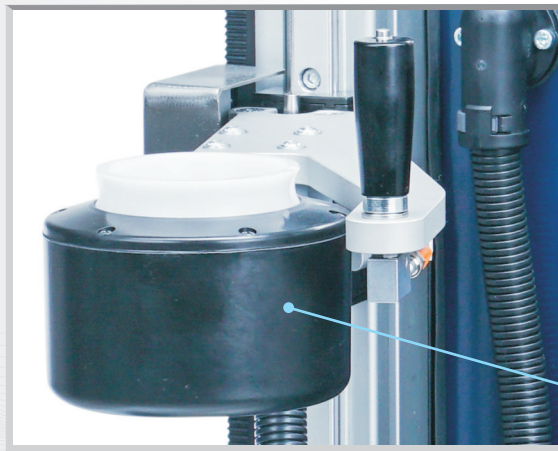

1 Induction coil for quick shrinking

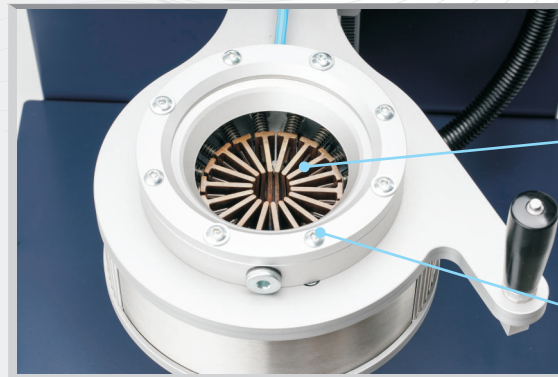

2 Flexible mounted cooling elements

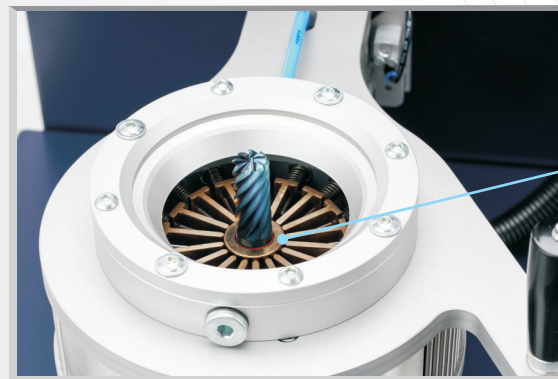

3 Ring nozzle for air cooling in combination with contact cooling

4 Cooling elements in cooling position on the shrink fit chuck

YOUR ADVANTAGES AT A GLANCE:

- Efficient design irrespective cooling, combined with contact and air cooling. Cooling time: 2 min
- No further cooling accessories necessary
- Stable linear guidance with secure locking
- Convenient moving of the unit due to counterweight
- Modular system for a simple change of components
- Forward-looking design with stainless steel

TECHNICAL DATA:

- Output (kW): 11
- Power supply: 3x400V + N/16A /50 HZ
- Clamping range (Diameter): 3–32
- For solid carbide + HSS shanks
- Compressed air connection
- Weight: 102 kg

Karl Schüssler GmbH & Co. KG
 Bahnhofstraße 108
 72411 Bodelshausen / Germany
 Phone +49 74 71 / 95 90-0
 Fax +49 74 71 / 95 90-90

www.k-schuessler.de

sk
 the μ -maker
SCHÜSSLER